

# Framery One

The world's most advanced  
soundproof office pod

07/2023



Framery One sets a new industry standard for what a soundproof pod is capable of. Optimized for video and designed for focus work, Framery one is a highly adaptable workspace packed with technology to help the entire office work better. This soundproof office pod features leading sound insulation and ventilation, and echo-free acoustics to let you focus on your work and connect online with people anywhere.

---

## Framery One – The world's most advanced soundproof office pod

Stunning design and world-class soundproofing make Framery One the ultimate one-person workstation. This pod is engineered for focus work or video calls and is compatible with Framery Connect. Framery One comes equipped with dual-embedded lighting optimized for video, adjustable ventilation & lighting and a height-adjustable table.



### Framery One

The core essential features of the ultimate soundproof workstation.

- Space for standing work or to add your own stool
- Additional upgrades available



### Framery One Premium

Get even more out of your Framery One with the premium package.

- Height-adjustable seat
- Dual footrests
- Activated carbon filter
- Fully-customizable materials & finishes

# Framery One / Furniture



**HEIGHT-ADJUSTABLE TABLE** provides comfort for all users. The table can be adjusted vertically between 74–116 cm / 29.1–45.7 in. The ample surface of the table (76.5 cm width & 46 cm depth/30.1 & 18 in) provides space for laptops, personal devices and other work tools.



**HEIGHT-ADJUSTABLE SEAT** has two footrests for comfortable working. The height can be adjusted vertically between 59–85 cm / 23.2–33.5 in.

# Framery One / Colors

## EXTERIOR

-  White (Standard)  
RAL 9016 Ultramatt
-  Black (Standard)  
RAL 9005 Ultramatt
-  Gray (Standard)  
S 7500 - N Ultramatt
-  Navy  
S 7020 - R90B Ultramatt
-  Sand  
S 2010 - Y20R Ultramatt
-  Powder Blue  
3421-R86B Ultramatt
-  Winter Moss  
S 7010-G10Y Ultramatt
-  Blush  
2728-R01B Ultramatt




## INTERIOR

-  Pure Gray (Standard)  
Tonal #60123 Gabriel
-  Navy  
Atlantic #66057 Gabriel
-  Sand  
Tonal #61180 Gabriel
-  Rouge  
Tonal #64210 Gabriel

## CARPET

-  Light Gray (Standard)  
Ex-dono Quartet #393330  
Fletco carpet
-  Dark Blue  
Zenith #T371880
-  Champagne  
Zenith #T371210 Fletco carpet
-  Grape  
Zenith #371680 Fletco carpet


## TABLE

-  White (Standard)  
White laminate
-  Black  
Black Laminate with  
anti-fingerprint surface
-  Oak veneer

## SEATING FABRIC

-  Graphite (Standard)  
Select #60051 Gabriel
-  Dark Blue  
Select #66144 Gabriel
-  Grape  
Select #61190 Gabriel
-  Rose  
Select #65117 Gabriel
-  Powder Blue  
Select #67098 Gabriel
-  Beige  
Select #61184 Gabriel
-  Green  
Selected #68209 Gabriel
-  Mustard  
Select #62098 Gabriel


# Framery One / Functionalities

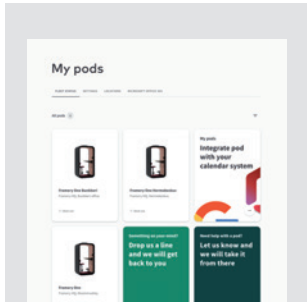

**FRAMERY CONNECT** is a revolutionary digital service that brings more functionality to Framery One pods. Framery Connect activates your Framery One, enables calendar connectivity, and gives you valuable insights into how your office works. With Framery Connect, your Framery One can be easily reserved through Google and Microsoft calendars. Framery One automatically creates a calendar reservation upon entry, which can be extended through the pod's UI Panel. And analytics data helps you see how and when your Framery One pods are used, and where they should be placed to optimize your office.




**UI PANEL** allows you to adjust the pod's lighting and ventilation according to your personal preferences. Choose from Work Mode or Video Mode lighting presets, or control the brightness of both lights individually. The integrated 4G module enables to see the pod's availability, and make reservations directly with the Bookable Pods functionality on the touchscreen. Charge your devices via power outlets (1 power socket, USB C socket, optional LAN) located on the UI Panel.




**VIDEO CONFERENCE LIGHT** is a dimmable LED panel embedded into the tech wall of Framery One improves the experience of video calls. Warm light is cast on the user's face in a wide spread with excellent color rendering capacity (90CRI), providing excellent illumination without bothering the user. The 4000K color temperature guarantees a natural look and feel with optimal user comfort. Adjustments to both the video conference light and the ceiling light can be made easily via the UI Panel.



**OCCUPANCY LIGHT** displays a red light with 360° visibility when stepping into your Framery One, to let the office know the pod is in use.



**ACTIVATED CARBON FILTER** keeps the air inside Framery One extra fresh and clean and free of odors with an activated carbon filter. The filter removes pollutants from the air with an adsorption process.

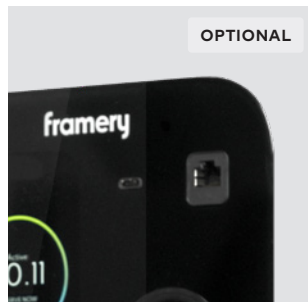

**LAN PORT** is possible to add to the UI Panel. This option includes a LAN cable.



**MOVABILITY KIT** allows you to easily relocate your Framery One without disassembly by lifting the levelling feet up and thus lowering the pod onto its wheels. The high load capacity polyurethane castor wheels are both durable and pliable. Number of wheels: 4.



# Framery One



## TECHNICAL SPECIFICATIONS

|                    |   |
|--------------------|---|
| Size               | EXTERIOR 225.5 × 122 × 100 cm / 88.8 × 48 × 39.4 in (h, w, d). With castors (comes with movability kit): extra 3 cm / 1.18 in in height. With activated carbon filter: extra 6.5 cm / 2.56 in in height. INTERIOR 204 × 102 × 93 cm / 80.3 × 40.15 × 36.6 in (h, w, d). DOORWAY 204 × 101.5 cm / 80.3 × 40 in (h, w).                             |
| Weight             | 357 kg / 787 lb.  |
| Ventilation Space  | Minimum recommended space for air to circulate. Above: 15 cm / 5.9 in. (No extra space needed on top of the filter housing.)  |
| Acoustics          | > 30 dB (Speech level reduction according to ISO 23351-1 testing method).   |
| Airflow            | Total airflow is 29l/s, 61 CFM (103.6 m <sup>3</sup> /h)<br>On standby mode the fans are working on 25 % of the maximum power.  |
| Lighting           | <b>CEILING LIGHT</b> color temperature 4000K, illuminance up to 500lux on the tabletop. <b>VIDEO CONFERENCE LIGHT</b> color temperature 4000K, illuminance up to 400lux on the user's facial area.  |
| Exterior materials | EXTERIOR Powder coated deep-drawn steel panels. GLASS Sound control laminated glass (4 + 4mm / 0.16 + 0.16 in). FRAME Matt black frames made from steel & aluminum.   |
| Interior materials | <b>SOLID WALLS AND ROOF</b> A sandwich element chassis, made of deep-drawn sheet metal & recycled acoustic foam. Replaceable interior panels made from PET sheets which are laminated with polyester fabric. <b>FLOOR</b> Anti-static and stain resistant low loop pile carpet. <b>TABLE</b> Formica laminate on birch plywood with varnish trim. |
|                    | The door handedness can be changed on-demand with simple tools, by flipping the front frame in its place.   |

## POWER

|                   |   |
|-------------------|---|
| Power consumption | <b>WHILE IN USE 34.5W</b> on standard configuration.<br><br>Standard configuration: <ul style="list-style-type: none"> <li>• LED lights: 23.5W.</li> <li>• Fans in total: 7W.</li> <li>• Other components: 4W.</li> </ul> <b>STANDBY MODE 6W.</b><br>Input 100–240 VAC, 10.0 A, 50–60 Hz. |
| Outlets           | Power socket, USB-C charger. Optional LAN port.   |
| Output values     | Output AC (power socket) 100–240 VAC, 6.6A, 50–60 Hz. Output USB C charger: 18W.  |
| Radio networks    | LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28 LTE-TDD: B38/B39/B40/B41 WCDMA: B1/B2/B4/B5/B6/B8/B19 GSM: B2/B3/B5/B8 BLE.   |
| Output powers     | BLE 10 dBm, LTE 23 dBm, GSM 850/900 33 dBm, GSM 1800/1900 30 dBm, WCDMA 24 dBm.<br><br>Power cord can be led out of the bottom corner of the pod or from the roof. The cord length outside the pods is 4.5 m / 177.6 in.  |

## DIMENSIONS

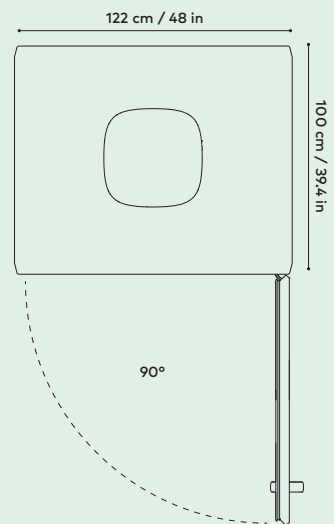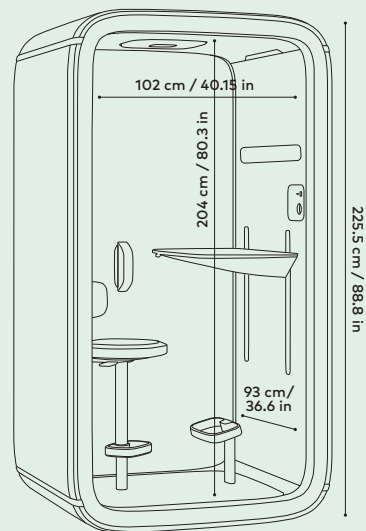

Framery One is  
UL GREENGUARD GOLD  
certified



Framery One shipped in North  
America is UL 962 listed